

Clamp system, Type PHL, Type PK


Movable bearing for non-insulated pipelines	
Material:	S235 or similar, threaded parts 8.8 / 8, sliding plate PA6, hot-dip galvanized
Camber:	M12 - 30 Nm
Joining profile width:	80 - 120 mm, other profiles on request *

Article no. Type PHL	h (BOP) [mm]	D [mm]	Article no. Type PK	h (BOP) [mm]	D [mm]	Ø pipe [mm]	H (MOP) [mm]	A [mm]	B [mm]	weight [kg]
PHL-022/120-R-F	40	82	-	-	-	21,3	51	80 - 120	8 - 16	0,8
PHL-027/120-R-F	40	87	PK-027/120-R-F	25	69	26,9	53	80 - 120	8 - 16	0,8
PHL-034/120-R-F	40	94	PK-034/120-R-F	25	77	33,7	57	80 - 120	8 - 16	0,8
PHL-043/120-R-F	40	103	PK-043/120-R-F	25	85	42,4	61	80 - 120	8 - 16	0,8
PHL-049/120-R-F	40	109	PK-049/120-R-F	25	91	48,3	64	80 - 120	8 - 16	0,8
PHL-061/120-R-F	40	121	PK-061/120-R-F	25	105	60,3	70	80 - 120	8 - 16	0,8
PHL-077/120-R-F	40	136	PK-077/120-R-F	25	123	76,1	78	80 - 120	8 - 16	0,9
PHL-089/120-R-F	40	149	PK-089/120-R-F	25	133	88,9	84	80 - 120	8 - 16	0,9
PHL-115/120-R-F	40	175	PK-115/120-R-F	25	165	114,3	97	80 - 120	8 - 16	0,9
PHL-140/120-R-F	40	200	PK-140/120-R-F	25	194	139,7	110	80 - 120	8 - 16	1,0
PHL-169/120-R-F	40	229	PK-169/120-R-F	25	221	168,3	124	80 - 120	8 - 16	1,1
PHL-220/120-R-F	40	279	PK-220/120-R-F	25	277	219,1	150	80 - 120	8 - 16	1,7
PHL-273/120-R-F	40	333	PK-273/120-R-F	25	331	273,0	177	80 - 120	8 - 16	1,8
PHL-324/120-R-F	40	384	PK-324/120-R-F	25	381	323,9	202	80 - 120	8 - 16	1,8

Overview of different types of support for non-insulated pipelines

Installation height h=40 (BOP)			Installation height h=25 (BOP)		
Operation	Type	page	Operation	Type	page
Movable bearing	Type PHL	page 5	Movable bearing	Type PK	page 5
Guide bearing	Type PHF	page 6	Guide bearing	Type PK-RSB	page 8
Anchor	Type PHP	page 7	Anchor	Type PK-RSBL	page 8

Ordering example: PHL-115/120-R-F

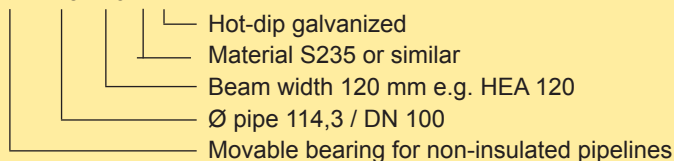

* Notes: Should you need a clamp-systems for other types of section, please indicate this in article-no.

e.g. Ø pipe 60,3; HEA 160: PHL-061/160-R-F

Constructive Notice: Clamp-system can also be used for stainless steel pipes.

Other diameters on request.