


Lift-off prevention, Type AH for Dual Cylinder roller support Type RSA

Material:	S235JR
Finish:	Steel parts hot-dip galvanized, complete with bolts and nuts

Article no.	for rollen support Type	bolt size on insulating saddle	L [mm]	B [mm]	H [mm]	weight [kg]
AH-RSA-008-F	RSA-008-F	M8	198	300	15	0,9
AH-RSA-015-F	RSA-015-F	M10	266	300	20	1,3
AH-RSA-025-1-F	RSA-025-1-F	M12	322	300	30	2,8
AH-RSA-025-2-F	RSA-025-2-F	M12	438	300	30	3,2
AH-RSA-050-1-F	RSA-050-1-F	M12	420	300	50	5,2
AH-RSA-050-2-F	RSA-050-2-F	M12	490	300	50	5,6
AH-RSA-050-3-F	RSA-050-3-F	M12	640	300	50	6,6
AH-RSA-100-1-F	RSA-100-1-F	M30	550	300	70	15,0
AH-RSA-100-2-F	RSA-100-2-F	M30	666	300	70	16,0

Ordering example: AH-RSA-050-2-F

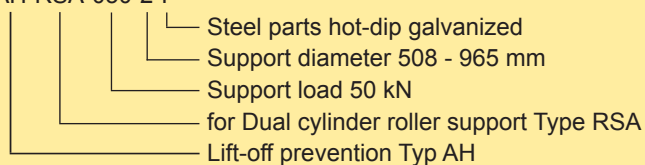

* Notes: The lift-off prevention need to be bolted to the roller bearings on site