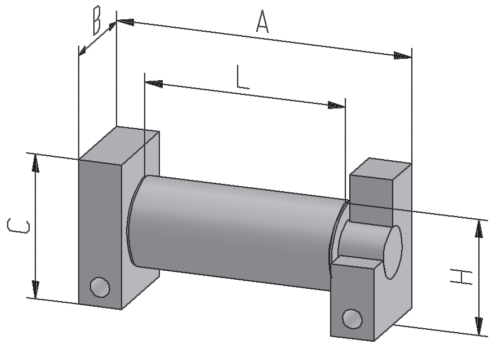

Roller Supports, Type REF with guide

Material:	Roller: **S235;** pin: **1.4571;** sheeks: **S235JR**
	Bearing bush: composite bearing made of sintered bronze / PTFE for dry running in difficult conditions
Finish:	Steel parts hot-dip galvanized

Article no.	support load F_z [kN]	L [mm]	A [mm]	H [mm]	B [mm]	C [mm]		beam clamps Typ	weight [kg]
REF-080/15-F	15	80	146	65	60	85		M12	3,8
REF-100/15-F	15	100	166	65	60	85		M12	4,0
REF-120/15-F	15	120	186	65	60	85		M12	4,3
REF-140/15-F	15	140	206	65	60	85		M12	4,5
REF-080/25-F	25	80	146	80	70	100			6,0
REF-100/25-F	25	100	166	80	70	100		M12	6,3
REF-120/25-F	25	120	186	80	70	100		M12	6,7
REF-140/25-F	25	140	206	80	70	100		M12	7,1
REF-080/50-F	50	80	146	100	100	125		M16	10,6
REF-100/50-F	50	100	166	100	100	125		M16	11,7
REF-120/50-F	50	120	186	100	100	125		M16	12,5
REF-140/50-F	50	140	206	100	100	125		M16	13,4
REF-200/100-F	100	200	266	125	130	160		M20	27,0

Ordering example: REF-100/50-F

- Steel parts hot-dip galvanized
- Support load 50 kN
- Roller length: 100 mm
- Roller support Type REF, with guide

Notes: Mounting of the roller bearings on steel constructions with profile clamps type PKR, see page 17

Errors and technical modifications reserved, images similar, Copyright © Bernecker 2018