



PSK / PPK
 Support plate made from
 carbon steel respectively PA6

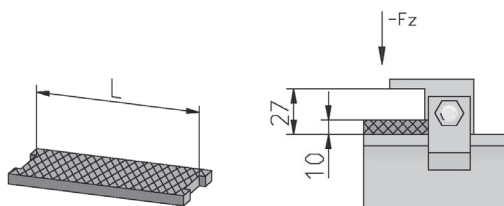

PTK
 Support plate made from
 carbon steel with PTFE

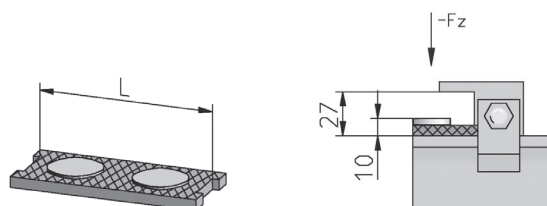

Support plate, Type PSK, PPK und PTK , for clamp system Type PKT (page 12)

Support plate	
Material:	PSK made of steel, PPK made of PA6, PTK made of steel with cellular PTFE
Operational temperatures:	Steel until 300°C; PA6 / PTFE -35°C to +80°C
Joining profile width:	100 - 300 mm, other profiles on request

Article no. Type PSK made of steel	Article no. Type PPK made of PA	Article no. Type PTK made of steel with PTFE	L [mm]	H [mm]	T * [mm]	-F _z [kN]	weight [kg]
PSK-060-R-F	PPK-060-PA	PTK-060-R-F	70	10	60	12	0,3
PSK-080-R-F	PPK-080-PA	PTK-080-R-F	90	10	80	12	0,4
PSK-100-R-F	PPK-100-PA	PTK-100-R-F	110	10	100	12	0,5
PSK-120-R-F	PPK-120-PA	PTK-120-R-F	130	10	120	25	0,6
PSK-140-R-F	PPK-140-PA	PTK-140-R-F	150	10	140	25	0,7
PSK-160-R-F	PPK-160-PA	PTK-160-R-F	170	10	160	25	0,8
PSK-200-R-F	PPK-200-PA	PTK-200-R-F	210	10	200	25	1,0
PSK-220-R-F	PPK-220-PA	PTK-220-R-F	230	10	220	35	1,1
PSK-240-R-F	PPK-240-PA	PTK-240-R-F	250	10	240	35	1,2
PSK-260-R-F	PPK-260-PA	PTK-260-R-F	270	10	260	35	1,3
PSK-280-R-F	PPK-280-PA	PTK-280-R-F	290	10	280	35	1,4
PSK-300-R-F	PPK-300-PA	PTK-300-R-F	310	10	300	35	1,5

Ordering example: PSK-120-R-F

- └─ Hot-dip galvanized
- └─ Material S235JR
- └─ Width of pipe support 120mm, e.g. for a GLT-120/115-R-B3
- └─ Support plate made of steel

* Notes: T=width of pipe support, see page 12